


ANALOG ELECTRONIC CONTROL

BYPASS TERMINAL UNIT PRESSURE DEPENDENT

MODEL: A3400 E3

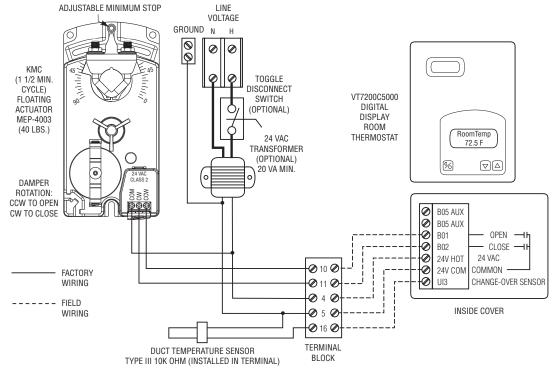

CONTROL SEQUENCE: E3 AUTOMATIC HEATING/COOLING CHANGEOVER (VARIABLE AIR VOLUME)

Advanced micro-computer electronics and PI control algorithms provide precise temperature control. The thermostat provides a true multi-position modulating output to a tri-state floating actuator. This eliminates wasted energy caused by typical on-off cycling with conventional thermostats resulting in significant energy savings and superior comfort. Control accuracy is $\pm\,0.4^\circ\text{F}\ (\pm\,0.2^\circ\text{C})$ around set point. The room occupant is able to reduce the set point to the lowest comfortable setting. A mechanical air volume minimum stop is provided (field set).

Sequence of Operation:

This arrangement is for systems supplying cool air in summer and hot air in winter. A duct temperature sensor senses inlet temperature and automatically reverses control action when supply air is above 78°F (26°C).

Cooling Mode:

Supply air system in cooling mode (below 75°F (24°C)). On a rise in room temperature above set point, the bypass damper will modulate open, increasing the flow of cool air to the room, closing the bypass at the same time. On a fall in room temperature below set point, the bypass damper will modulate closed, reducing the flow of cool air into the room and opening the bypass at the same time.

Heating Mode:


Supply air system in heating mode (above 78°F (26°C)). On a rise in room temperature above set point, the bypass damper will modulate closed, reducing the flow of warm air into the room to maintain set point and opening the bypass. On a fall in room temperature below set point, the bypass damper will modulate open, increasing the flow of warm air into the room to maintain the set point and closing the bypass at the same time.

Note:

The room thermostat requires field configuration. See supplied VT7200 series installation guide.

Options and Accessories:

- ☐ 24 VAC Control Transformer
- □ Toggle disconnect switch
- ☐ Special features:



 SCHEDULE TYPE:
 Dimensions are in inches (mm).

 PROJECT:
 DATE
 B SERIES
 SUPERSEDES
 DRAWING NO.

 CONTRACTOR:
 2 - 29 - 16
 3400
 8 - 24 - 15
 3400CD-E3